

# BROYSAN 4



MACERATORE CON PRESTAZIONI ELEVATE DI TRITURAZIONE E POMPAGGIO DOTATO DI CESTELLO-FILTRO CON LAMA ROTANTE IN ACCIAIO INOX E POMPA SEPARATA.


42x18x h 30 CM



**EN»** Macerator with high shredding and plumbing performance, it has a **basket-filter with rotating blades in stainless steel and a separate pump.**

**FR»** Macérateur à hautes prestations de broyage et de pompage, équipé d'un **filtre à tambour à lames rotatives en acier inox et d'une pompe séparée.**

**DE»** Hochleistungs-Mazerator zum Zerkleinern und Abpumpen, ausgestattet mit einem **Filterkorb mit rotierenden Edelstahlklingen und einer separaten Pumpe.**

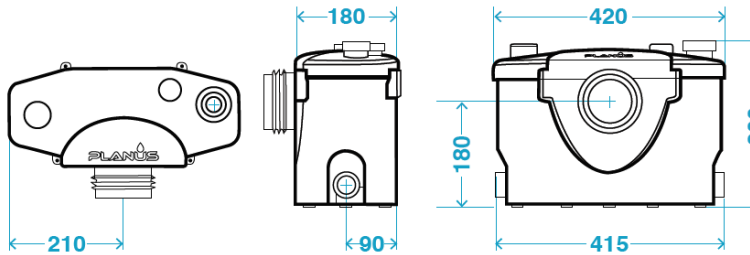

**DATI TECNICI**

<b>Tensione di alimentazione</b> Power Supply / Alimentation / Stromversorgung	AC 220-240V, 50Hz
<b>Assortimento</b> Power / Puissance / Leistung	420W
<b>Grado di protezione</b> Degree of protection / Indice de protection / Schutzarten	IP68
<b>Norme</b> Norms / Normes / Normen	EN 60335-1 EN 60335-2-84 EN 12050-3
<b>Prestazioni</b> Performances / Performances / Performance	Max 8mt – Vedi Grafico a lato See diagram aside / Voir le diagramme de côté / Siehe nebenstehendes Diagramm
<b>Diametro tubo di scarico</b> Discharge pipe diameter / Diamètre de l'évacuation / Abflussdurchmesser	22/28/32/40mm
<b>Temperatura massima acqua</b> Max water temperature / Température maximale de l'eau / Maximale wassertemperatur	50°C

